

This compact and light weight Buzzer Cum Flasher is designed for electrical control panels. It is suitable for any type of fault warnings.

The high pitch sound enables a user to identify fault upto a distance of 40 feet & the flasher function complements the beeping sound.

For superior material strength & quality, the Buzzer cum Flasher is made using strong ABS body & poly-carbonate glowing parts.

- High pitch 90 to 110 dB sound.
- 1 Bright flashing light.
- 22.5 mm cutout.
- Available voltages-12,24,110,230 (VAC,DC,AC/DC).
- Available colours - Red, Green, Amber Blue, White.
- IP - 20 weather protection
- Flashing frequency 1 sec on 0.5 sec off.
- ABS body, polycarbonate cap.



TECHNICAL

Input Voltage (VAC/DC).	12, 24,110, 230 (VAC, DC, AC/DC)
Frequency (Hz)	1 sec ON, 5 sec OFF
Operating Temp.	-20deg. to 60 deg. C
Storage Temp.	-30deg. to 75 deg. C
Protection Rating	IP 20
Relative Humidity	0.65 max
Altitude	Max 2000 m.
Weight	50 gms
Mounting plate thickness	2.5mm. sq x 2 nos.

PERFORMANCE

Sound level (dB)	105
Rated insulation voltage (VAC / DC)	250
Insulation resistance (M ohm)	1000
Rated Operational Current (mA)	20
Insulation Resistance (M ohm)	1000
Durability	over 10000 cycles
Shock resistance	490 m / sq. sec
Power consumption @24VDC (W)	5
power frequency withstand voltage (VAC)	2000 VAC, 1 min

BODY


Material	ABS body
Cap	Poly-carbonate Cap

Manufactured by : Steam Airetric Controls

Made in

Steam Airetric Controls

Plot. No. A/34, Additional Ambarnath MIDC, Anand Nagar, Ambarnath (E), Dist. Thane Maharashtra, India – 421 506.

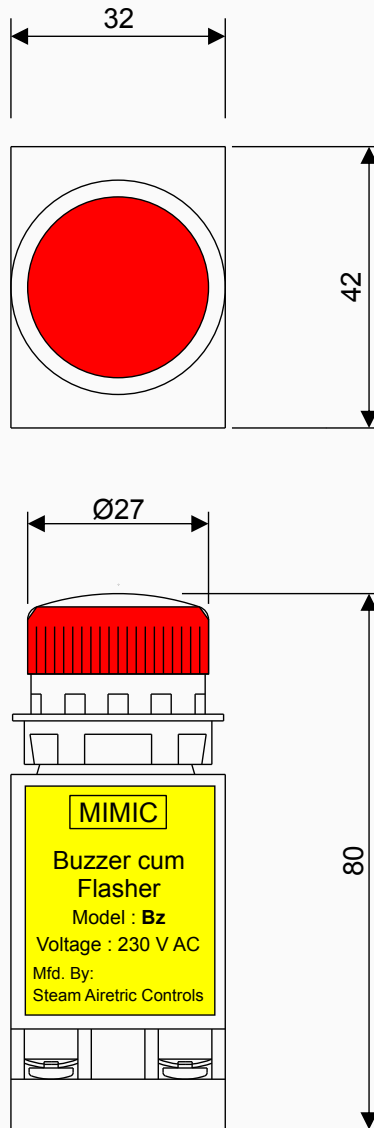

- All Dimensions are in mm
- Dimension for reference purpose.
- Dimension may change without notice, development is continuous process

Manufactured by : Steam Airetric Controls

Made in 

Steam Airetric Controls

Plot. No. A/34, Additional Ambarnath MIDC, Anand Nagar, Ambarnath (E), Dist. Thane
Maharashtra, India – 421 506.

MIMIC®